

Lift-N-Tow

**MEETS / EXCEEDS
OSHA & ANSI
REQUIREMENTS**



Shown with optional
Combo Hitch

Model 1390B

- ◆ Universal Fit – Slips on the Forks
- ◆ 4,000 lbs. - Max. lift capacity on Swivel Hook
- ◆ 2,000 lbs.* - Max. lift capacity on Receiver/Jib
- ◆ 10,000 lbs.* - Max. gross towing weight
- ◆ 220 lbs. - Empty Weight w/o Adapter and Hitch
- ◆ Accepts up to 6" wide forks
- ◆ Chain & Hook secures Lift-N-Tow to forklift
- ◆ Overall length – 54" (w/o adapter)

* CAUTION: Do not exceed capacity of selected Adapter and Hitch.

DON'T GET A CITATION
OSHA prohibits the practice of torching
a hole in the fork for a ball.

Change easily from Ball, to Pintle, or Combination Hitch

Receiver/Jib accepts Standard 2" Trailer Adapter

Lift-N-Tow & Hitches Sold Separately



ADAPTER with 2" BALL
Model 1391

Max. Vertical Lift – 600 lbs.
Max. Gross Towing Weight – 6,000 lbs.
Horizontal Center of Gravity – 28"
Weight with 2" Ball – 230 lbs.





ADAPTER with COMBO HITCH
Model 1393

Max. Vertical Lift – 2,000 lbs.
Max. Gross Towing Weight – 10,000 lbs.
Horizontal Center of Gravity – 30"
Weight with Combo Hitch - 240 lbs.



ADAPTER with PINTLE HITCH
Model 1392

Max. Vertical Lift – 2,000 lbs.
Max. Gross Towing Weight – 10,000 lbs.
Horizontal Center of Gravity – 29"
Weight with Pintle Hitch – 235 lbs.

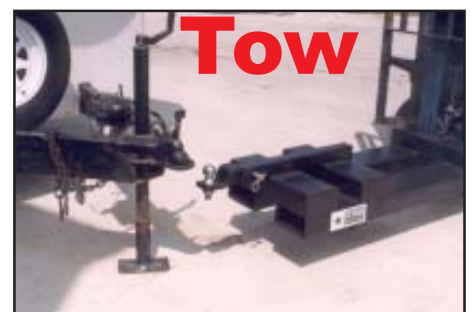

4101 Garland Dr., Fort Worth, TX 76117
PH 817-485-6073 FAX 817-428-6008
USA & Canada Toll Free 800-541-1797
www.starindustries.com

Dealer:

Operating Manual/Safety Information
Available online - www.starindustries.com